



5881

A. F. BEAM PENTODE



Base: OCTAL

$$U_f = 6,3 \text{ V}$$
$$I_f = 0,9 \text{ A}$$

Typical Characteristics: Class A1:

Single tube Push-Pull


$U_a =$	250	270	V
$U_{g2} =$	250	270	V
$U_{g1} =$	-14	-17,5	V
$I_a =$	63	134	mA
$I_{g2} =$	4,3	11	mA
$R_a =$	2,5	-	k Ω
$R_{a-a} =$	-	5	k Ω
$N =$	6,7	17,5	W

Limiting Values:

	Triode	Pentode	
$U_a =$	450	500	V
$U_{g2} =$	450	450	V
$W_a =$	26	23	W

Grid No 1 Circuit Resistance

Fixed Bias	0,1	M Ω
Self Bias	0,5	M Ω

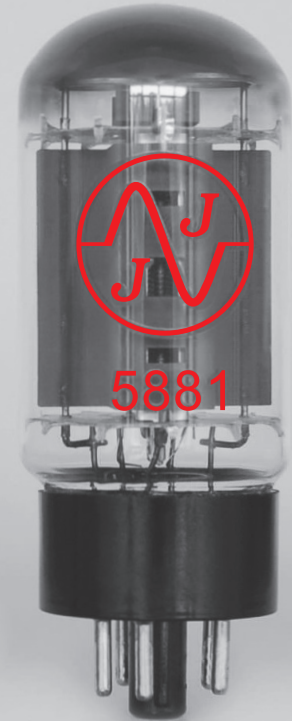

TRANSFER CHARACTERISTICS

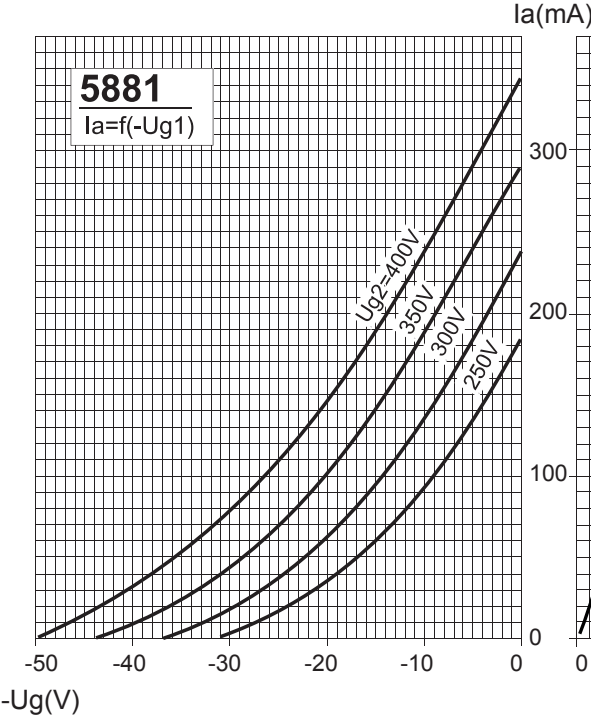


PLATE CHARACTERISTICS

